


ASR108A

1U Chassis with 2 Compute Blades

- λ 1U rackmount chassis supports **mini ITX motherboard**
- λ Supports 2 computing blades
- λ back-to-back installation to meet 1U-4 blades high density servers requirement
- λ One standard 250W Flex ATX PSU in each blade

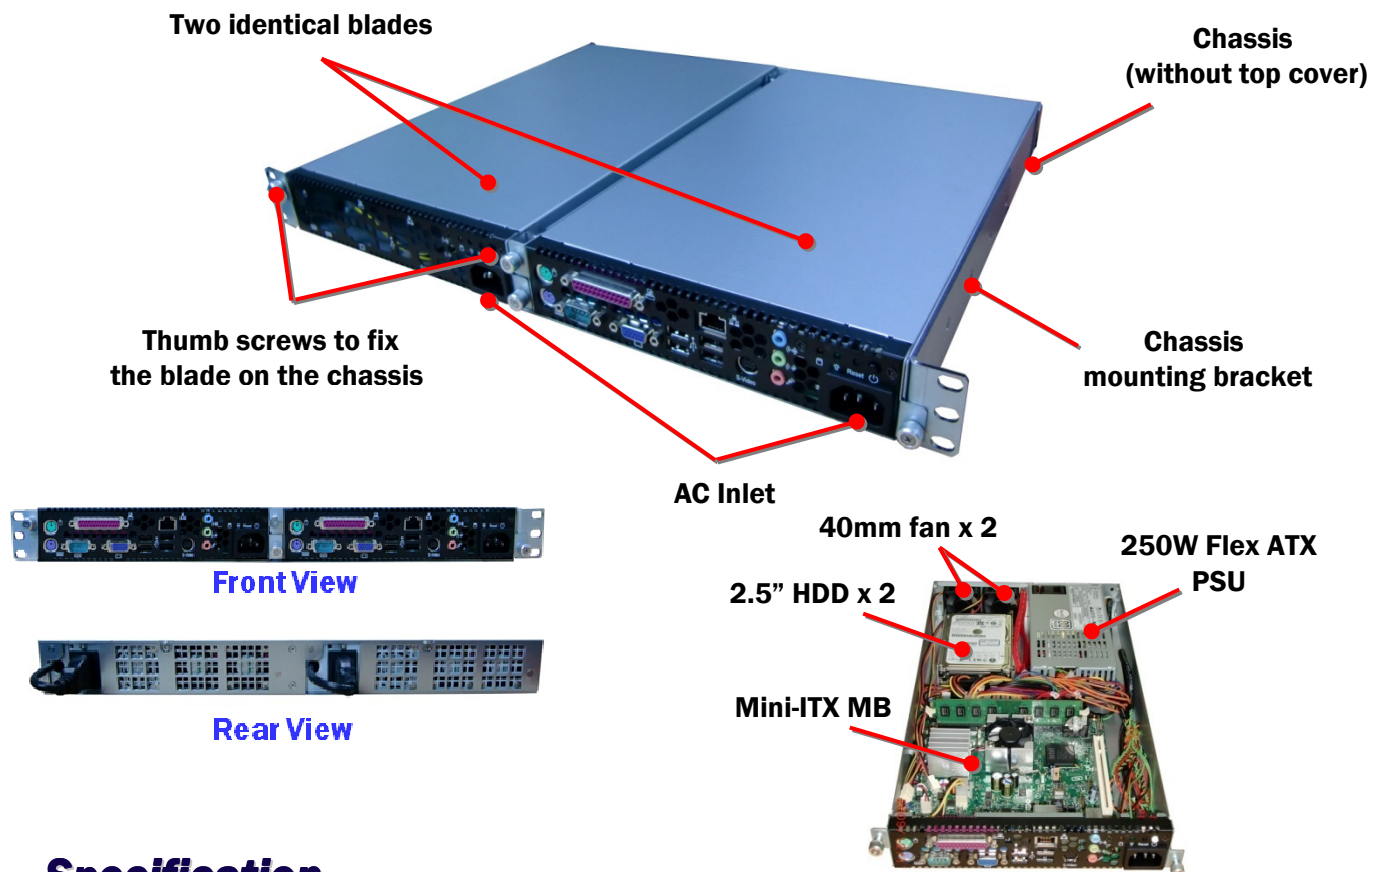

Specification

Material	Heavy Duty Metal
Form Factor	1U Chassis, Supports Mini-ITX MB
Power Supply	Default 250W Flex ATX PSU in Each Blade 300W PSU Optional
Drive Capacity	2 x 2.5" HDD in Each Blade
Cooling Fan	Default 2x 4020mm Fan, 2 x 4028mm Fan Optional
LED Indicators	Power on, HDD
Buttons	Power, Reset
Dimension(DxWxH)	Chassis 350 x 430 x 44mm ; Blade 348 x 206.8 x 43mm
Recommended MB	Supermicro X7SPA, ASUS Hummingbird Lite

