


# ASR502

## 5U 10 blades Rackmount Chassis

- λ 5U rackmount chassis supports **mini ITX motherboard**
- λ Supports 10 computing blades
- λ back-to-back installation to meet 5U 20 blades high density servers requirement
- λ One standard 250W Flex ATX PSU in each blade



Front View

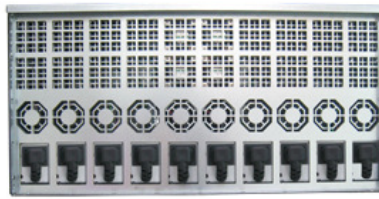

Rear View



### Specification

Material	Heavy Duty Metal
Form Factor	5U Chassis with 10 blades; supports Mini-ITX MB
Power Supply	Default 200W Flex ATX PSU in Each Blade 250W/300W PSU Optional
Drive Capacity	2 x 2.5" HDD or 1x3.5" HDD in Each Blade
Cooling Fan	2x 4020mm Fan
LED Indicators	Power on, HDD
Buttons	Power, Reset
Dimension(DxWxH)	Chassis 365.3 x 442.6 x 220.7 mm ; Blade 349 x 206.8 x 42.6mm
Recommended MB	Supermicro X7SPA, ASUS Hummingbird Lite, MSI MS-96E5/MS-96D9, Tyan S3115, Intel D945GCLF2D



Ashinne Technology Co., Ltd.

5F-4, No. 12, Lane 609, Sec.5, Chung Hsin Rd., San Chung City, Taipei County 241, Taiwan

TEL: +886-2-7716-5168 FAX: +886-2-7716-7168

[www.ashinne.com.tw](http://www.ashinne.com.tw)

e-mail: [sales@ashinne.com.tw](mailto:sales@ashinne.com.tw)